


Package contents (parts are not to scale):

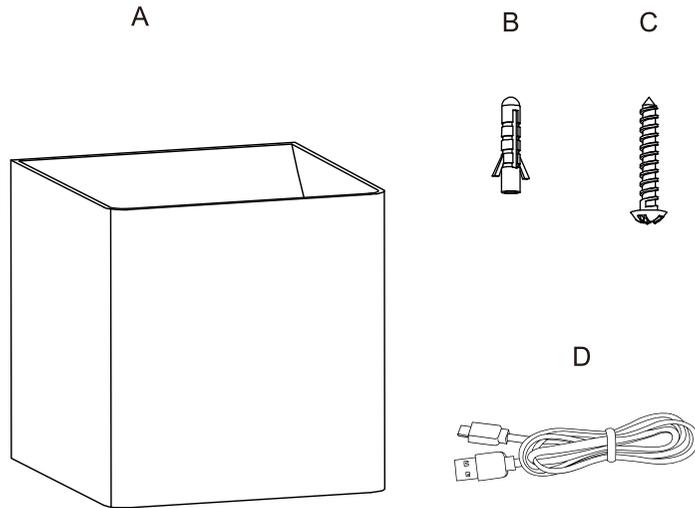

Part	Description	Quantity
A	Fixture body	1
B	Wall expansion particle(Φ6*L28mm)	2
C	Cross pan head self-tapping screw (M4*L30mm)	2
D	Type-C cable	1

Light source

Max. LED 4.5W 700Lumen 3000K

Lamp gurantee: 3 years(battery recharging 500 times)


Care and Cleaning

EXTERIOR MAINTENANCE

1. To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
2. Do not use any cleaners with chemicals, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

WALL LAMP

Art Nr. 76149-010-71(IP54)

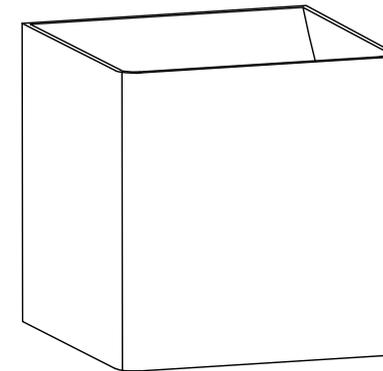


Pre-Installation

PLANNING THE INSTALLATION


Read all instructions before assembly and installation. Before starting installation of the fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. To avoid damaging this product, assemble it on a soft, non-abrasive surface such as carpet or cardboard.

TOOLS REQUIRED

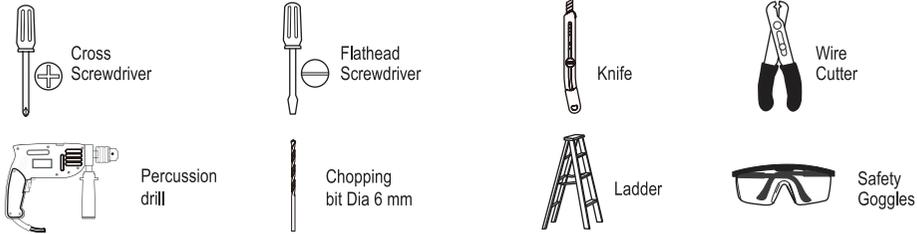


Installation


Step 1.

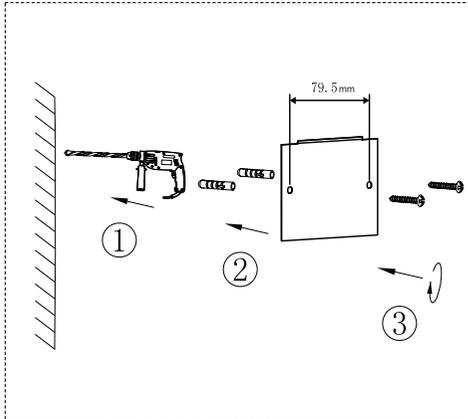


Step 2.

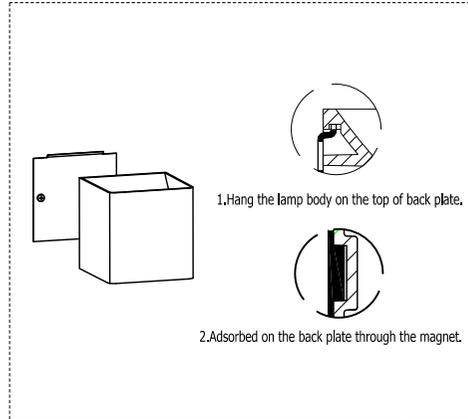

Switch instruction:

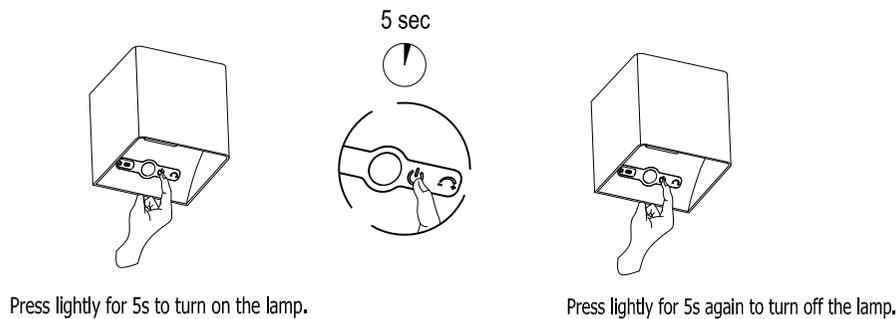


Type C charging:

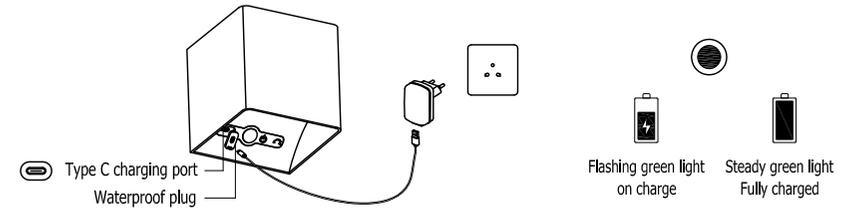

Open the waterproof plug. Insert the Type C charging cable and charge about 5hrs. Unplug the cable when the green light is constantly on. Then restore the waterproof plug.


The green indicator will flash when the lamp is on charge and be steady when fully charged.

Low Battery Alert:




1. Fully charged the battery before initial use.
2. Advise to use Type-C charging in the following cases.
Battery charge $\leq 20\%$: Orange indicator will flash 5 times and brightness will decrease to 20%.
Battery charge $\leq 10\%$: Orange indicator will flash 5 times.
Battery charge $\leq 2.5\%$: Turn off automatically. For any key-press, the lamp will light for 2s only.

Mode switching:



Long press for 5s to turn on.
Press lightly to switch the mode.



Long press to adjust brightness.
Press lightly to standby.

Power on before switching modes

Dimming mode: Press lightly the mode-switching key to lighten the blue indicator. The light intensity keeps the previously setting. The blue indicator will be off after 10s. Long press the key to adjust brightness. Press lightly the key to enter the standby mode.

Sensing mode:

Press lightly the mode-switching key to lighten the orange indicator and enter the infrared sensing mode. The light intensity keeps the previously setting. The orange indicator will be off after 10s. Long press the key to adjust brightness.

1. When the day light is less than 50lux and someone pass by, the orange indicator will turn off after 10s and the lamp will delay for 30s. If someone is detected again during the delayed time, the timer will be reset until no one is detected. Then the light will turn off.

2. When the day light is more than 80lux, the orange indicator and the lamp will turn off after 3s.

