



<p>Content:</p>   x1  x1	<p>Dimension:</p>   <p>*Dimensions in mm</p>
--	---

Description


LED CORD DIMMER 80VA/W

Specs:

Rated input voltage:	220-240Vac, 50Hz
Power range:	3-80W @ 220-240V LED
	10-100W @ 220-240V INC, HAL
Type of load:	LED Retrofit I Incandescent-halogen
Dimming:	Push button
Ambient temperature (Ta):	35 °C
Cables section:	0.75 mm ²
Dimension:	32.50mm*20.40mm*65.60mm
Item weight:	24.9g

Installation

1. Unscrew the closing screws A
2. Take out the front cover F
3. Unscrew the cable locker E
4. Move the terminal fitting D and unscrew C
5. Connect supply cable to the terminals L and N of the electronic board.
6. Connect lamp cable to the terminal identified by symbol of the electronic board.
7. Screw cord anchorage C and put D back.
8. Screw the cable locker E.
8. Mount front F and back B, screwing the screws A.

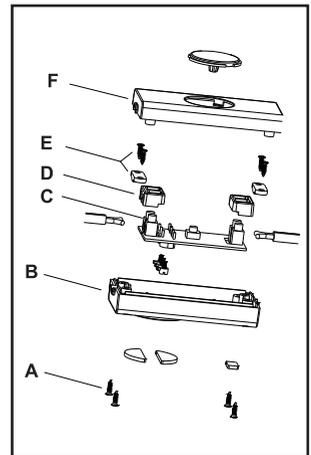

Operation

1. ON and OFF
 - quick press to on/off and push button to dim
2. MIN. MAX. settings
 - clockwise to increase the brightness
 - anti-clockwise to decrease the brightness
3. SPEED setting
 - clockwise to increase the dimming speed
 - anti-clockwise to decrease the dimming speed

