



<p><b>Content:</b></p> 	<p><b>Dimension:</b></p>  <p>*Dimensions in mm</p>
---	---


**Description**  
LED CORD DIMMER 80VA/W-white  
LED CORD DIMMER 80VA/W-black

**Specs:**

Rated input voltage:	220-240Vac, 50Hz
Power range:	3-80W @ 220-240V LED 10-100W @ 220-240V INC, HAL
Type of load:	LED Retrofit I Incandescent-halogen
Dimming:	Push button
Ambient temperature (Ta):	35 °C
Cables section:	0.75 mm <sup>2</sup>
Dimension:	Ø80.47mm,H 21.60mm
Item weight:	41g

**Installation**

1. Unscrew the closing screws F
2. Take out the front cover B and the knob A
3. Unscrew the cord anchorage C
4. Strip the cable to be connected
5. Connect supply cable to the terminals L and N of the electronic board.
6. Connect lamp cable to the terminal identified by symbol of the electronic board.
7. Mount cord anchorage C
8. Mount front B and back D, screwing the screws F.

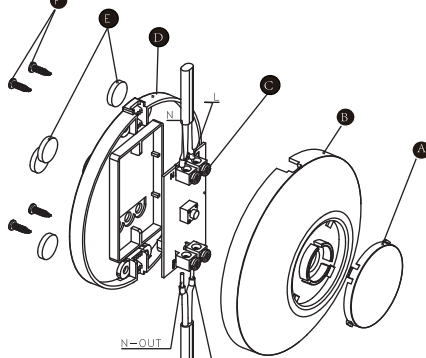

**Operation**

1. ON and OFF
  - quick press to on/off and push button to dim
2. MIN. MAX. settings
  - clockwise to increase the brightness
  - anti-clockwise to decrease the brightness
3. SPEED setting
  - clockwise to increase the dimming speed
  - anti-clockwise to decrease the dimming speed

