

NOVA LIFE INSTRUCTIONS MANUAL for WAKE-UP

Intelligent wake-up lamp
Art Nr. 83397-020-53




Please read this instruction carefully before use, and keep it properly.

Product List




Bedside clock



Adapter



User Manual



Type-C cable






Button battery

Note: The product, accessories, user interface, and other illustrations in the manual are schematic diagrams just for reference.

Due to updated and upgraded in product, there are a little different between in the real product and image, please refer to the real.

Product Introduction

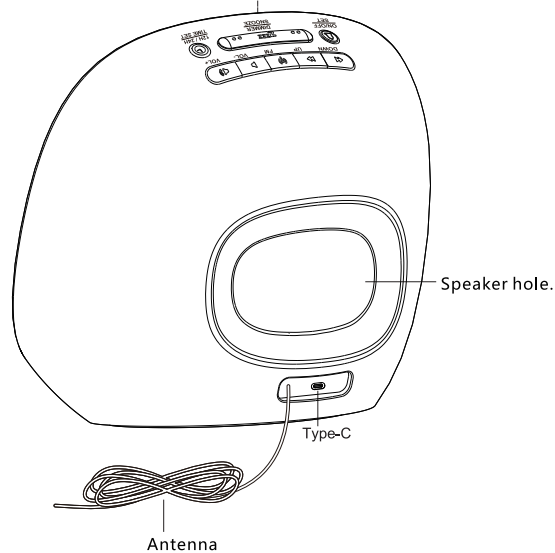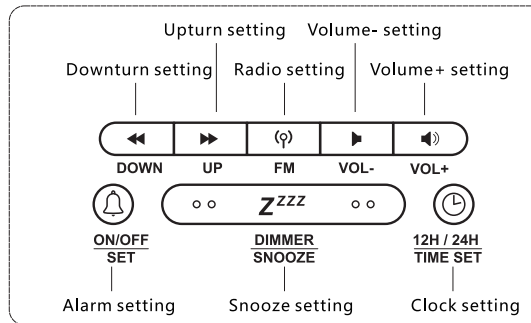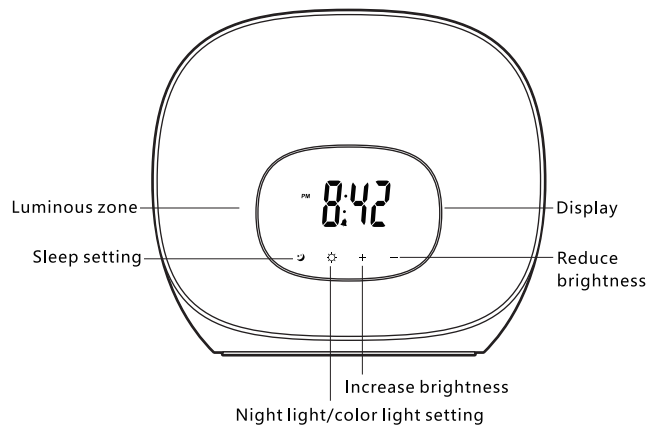


Product Introduction



Basic Parameter

Power specifications	DC 5V 2A
Rated power	10W
Night light power	7.3W
Color Temperature	2800K±100K
LED Number	26

Connect power

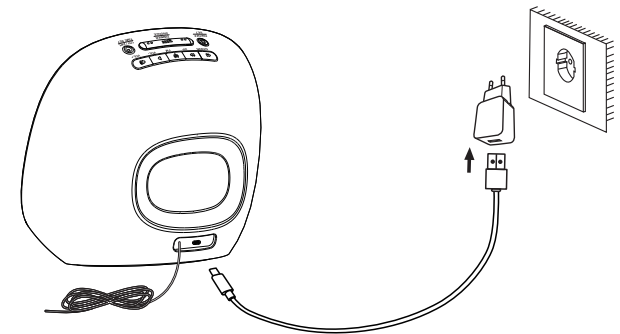


Power-on, full light for 2 seconds, display clock AM 0:00.
Power-on alarm clock AM:00 acquiescently, alarm closed.

Note:

- The external cable or cord of this lamp cannot be replaced; If the cord is damaged, the lamp should be scrapped
- Cannot be used on slopes greater than 6 degrees.

Warning: The light source in this luminaire should be replaced by the manufacturer or its service agent or a similarly qualified person.

Product Setting

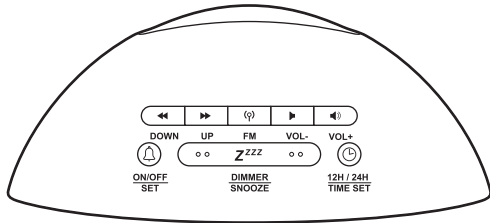

Clock settings

- 1>.Under clock display, press "⌚" 2 seconds, Enter the clock setting.Clock hour flash,Press "⌚" to switch hour/minute in circulation,press "◀" or "▶" to plus /minus.
- 2>.Press "⌚" 2 seconds or no press for 5 seconds, it will exit setting and back to clock mode.

Alarm settings

- 1>.Under clock display, press "🔔" to turn on/off the alarm.The alarm icon is displayed or closed accordingly.
- 2>.Press for "🔔" 2 seconds to enter alarm settings, FM function stop at this time, alarm icon and alarm hour flashing, press "🔔" to set alarm hour, minute, sound "🔔", (press "◀", "▶", to choose sound, press "▶", "◀", to control volume of sound),alarm clock mode(1: wake-up light+alarm,2: alarm only, 3:wake-up light only); wake-up light time, cancel settings.
- 3>.The setting items flash, press upturn button or downturn button to adjust the alarm hour or minute.
- 4>.There are eight kinds of alarm sounds, showing from 1 to 8.1-6 is natural sound,7 is BIBI sound, 8 is radio."🔔" will flash when 1 to 7 is setting and when set 8, radio icon will flash.The icons "🔔" will disappear when exit the settings.
- 5>.Wake-up light time is 10/20/30 minutes, displayed as "0:10/0:20/0:30"
- 6>.No press over 5 seconds or press "🔔" long for 2 seconds will exit the alarm settings and back to clock display.

Wake-up lamp functions

- 1>.Turn on the alarm function and set mode to 1 or 3,Based on the alarm time, set ten minutes earlier(wake-up time), then start the wake-up function.
- 2>.All functions will be ceased when it arrives the wake-up time, then wake-up function will start. The lights started to brighten gradually and the lights changed in ten levels. When the alarm time was reached, the lights reached the brightest.
- 3>.In the process of wake up, press "🔔" to stop becoming brighten, but light brightness unchanged. Turn off the wake-up and alarm function, the alarm icon is not displayed,at this time the touch button is effective,and the light can be adjusted.
- 4>.During the wake-up process, other buttons are invalid, the touch keys are invalid, and other functions do not respond.
- 5>.If the time is set within the wake-up time range, the wake-up function will not respond. For example: If the alarm time is 7:00, wake-up time is 30 minutes, set the time to 6:45, the wake-up function will not respond.

Alarm functions

- 1>.When the alarm function is on and not in the settings, the alarm time expires, all functions are stopped, alarm is entered, and the bell rings for one hour.
- 2>.During alarm, touch dimmer invalid.
- 3>.During alarm, the volume changes from low to loud gradually.
- 4>.During alarm, press "🔔" to stop alarm function.
- 5>.During alarm, press "Zzzz" to stop sound and get into snooze function.
- 6>.During alarm, press upturn, downturn, alarm, clock, radio button to stop alarm sound and get into related function.

Product operation

Snooze functions

- 1>.During snooze function, "Z" will display, press "🔔" to cancel snooze and alarm function.Any other buttons can not cancel the snooze, but get into related function.
Ps: Reset the time can cancel snooze function.
- 2>.Snooze for 10 minutes, all functions will stop, alarm bell will ring, if no any operation,it will ring for 1 hour. During the ring,snooze can be reset for no times limit.

FM functions:

- 1>.Under clock mode, press "📻" to get into the radio function, the initial channel is 87.5.
- 2>.Three seconds long press "📻" to get into automatic searching mode, the searching way is from minimum channelto max and autosave. The storage will be deleted from old to new. The max storage is 40 groups channel.
- 3>.When the radio is on, press"◀"or "▶" back to radio mode and change to storage channel. Two seconds long press"◀"or "▶" to quick adjust channel, it will stop once received channel, fast press "◀"or"▶"to stop, press"📻" to close radio.
- 4>.Channel storage: after automatic searching, for example, channel 1 is 90.5,two seconds long press "◀"or"▶", search automatically to 91.5, channel one 90.5 will be replaced by 91.5.If 91.5 is still the one you want, two seconds press "◀"or"▶" searching automatically to the channel you want. After power off long press "📻" to regain automatic searching channel before.
- 5>.Press "▶"/"◀" to up/down volume..
- 6>.Press "📻" to quit radio mode, back to clock mode.
- 7>.On radio mode, back to clock mode if five second without touching, radio on and indication displayed.

Snooze function

- 1>.Under normal clock display, press "🌙" to get into setting mode, Press this key again to select the time sequence :10-20-30-OFF Cycle adjustment (2 seconds after selection) automatically starts to sleep and the light will turn on.
- 2>.When the snooze time is up, the light will turn off automatically. if you turn on the FM radio during sleep, it will be turned offtogether with the light.
- 3>.During snooze time, the light brightness will change from light to dark in 10 different grades according to your snooze time. Press"+"/"-" can control the brightness, but the gradual change function is invalid, the light will turn off after snooze time.
- 4>.During snooze time, press "🌙" to cancel snooze, press "🌙"to turn off function, and the light can be turned off at this time.

Light function

- 1>.Under the situation of no wake-up light, no alarm ring, touch dimmer is available, touch"☀️"to adjust the light brightness.
- 2>.Short press"☀️"to open or stop sunlight function, press brightness +/- to adjust the brightness,a short press is a 10-level dimming, and a long press is a step-less dimming.

RGB atmosphere light function


- 1>.Under the situation of no wake-up light, no alarm ring, touch dimmer is available, touch"☀️"to adjust the light brightness.
- 2>.Long press"☀️" 3s to open RGB color light
- 3>.Then short press the"☀️" key, can adjust the color light mode, in turn: dazzling - light - gradient
- 4>.Long press"☀️" 3s to shut down RGB function.

Product operation

Other functions

- 1>.Under clock mode, short press "Zzzz" to adjust the brightness of LCD screen in circle.(high brightness, low brightness, turn off)
- 2>.Unplug the DC power supply (internal battery is working normally)the display is off, the light is off, the sound stops, all functions stop responding, but the clock continues to go.

Button battery replacement

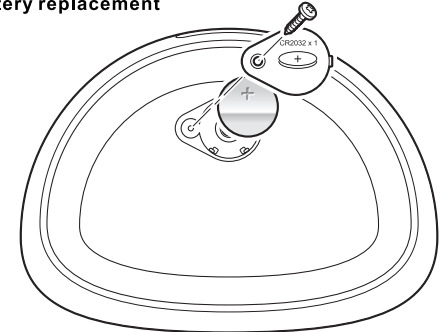

*Please remove the insulation strip after receiving the product and start using it.
Battery :CR2032

1. Insert the screwdriver into the battery cover slot on the lamp holder, turn the screw to the left, remove the battery cover, and then the battery can be removed.
2. Place the "+" side of the new battery upward.

Precautions

- Do not disassemble the product yourself to avoid electric shock.
- Do not place the product on an unstable table during use to prevent the product from falling and being damaged.
- Do not expose the product to high temperature and high humidity environments.
- Please do not use an adapter that is not compatible with this product. For safety reasons, you must turn off the switch when not using this product for a long time.
- Power supply Unplug the power adapter from the power supply.
- Do not cover the power supply with cloth or paper during work, otherwise it may catch fire due to poor heat dissipation; do not use damaged power supplies.
- If the following conditions occur, please unplug the power cord first and stop using it.

*When the power cord or power plug is damaged or broken.

*This lamp holder is exposed to moisture or rain.

*When the shell of the lamp holder and the movable joints are damaged.

*When safety factors such as smoke or sparks occur with this lamp.

*When the LED lamp beads flash abnormally or are damaged
Children over 8 years old and people with physical or mental disabilities must have a clear understanding of the functions and operation methods of the product, and understand the instructions for using the product.

This product can only be used under certain precautions and under the guidance and supervision of adults.

Children cannot use this product alone. Children cannot clean and maintain this product alone.